



DL-SE SERIES

DL16SE
DL32SE

DIGITAL RACK MIXERS



The DL16SE and DL32SE digital mixers delivers 16 and 32 channels of proven DL series mixing in a stage-friendly, rack-mountable design. Loaded with extensive DSP processing, the DL16SE and DL32SE gives you the mixing power to sound great every night. Create stunning multitrack recordings via the 16×16/32×32 USB audio interface and play them back for an effortless virtual sound check. The Master Fader SE app allows intuitive control on up to 20 devices simultaneously, including the ability to digitally recall each and every setting for incredibly fast setup.



www.mackie.com





DL-SE SERIES

DL16SE
DL32SE

DIGITAL RACK MIXERS



MAIN FEATURES

- Convenient stagebox/rack design with built-in handle
- 16/32 Onyx+ preamps (8/16 XLR, 8/16 XLR/TRS combo with 2 Hi-Z)
- 8/10 fully assignable XLR outputs plus headphone output
- Connect to your wireless router and control with Master Fader SE app
- Per-channel EQ, filters, gate, compression and RTA/Spectrograph
- 4 stereo FX busses with studio-quality reverbs, delays, chorus and more
- Multitrack 16×16/32×32 USB audio interface for recording and playback
- Waveform OEM professional software and plugins included

POWERFUL PROCESSING & ROUTING

- 16/32 stereo-linkable input channels
- 8/10 output busses with 4-band PEQ + HPF/LPF, 31-band GEQ, comp/limiter, alignment delay and RTA/Spectrograph
- 6/8 stereo-linkable aux sends
- 6 stereo-linkable subgroups
- Main L/R bus
- 6 VCAs and 6 mute groups
- 4 stereo FX processors featuring studio-quality reverbs, delays, choruses, flangers, and many more with dedicated sends and returns
- Full I/O routing with A/B sources per channel
- Assignable oscillator including pink/white noise and sine waves
- Modern and Vintage options for comp/gate and EQ

WIRELESS MIXING

- Take complete control via iOS, Android, macOS or Windows devices
- No set FOH position — mix from anywhere
- Control from up to 20 separate devices at once
- Access Limiting allows performers to control their own monitor mixes without giving access to critical mixer functionality
- Universal Ethernet connection supports your wireless router of choice

MULTITRACK RECORDING & PLAYBACK

- 16×16/32×32 USB 2.0 audio interface for Mac or PC
- Record the show for later mixdown
- Perform a virtual sound check
- Play intermission music, backing tracks and more directly into a dedicated stereo return channel
- Flexible, low-cost studio recording solution
- Utilize Mac or PC audio plug-ins in a live environment

www.mackie.com






DL-SE SERIES

DL16SE DL32SE


DIGITAL RACK MIXERS

MASTER FADER SE CONTROL APP


- Intuitive and easy to master
- Fast navigation with view groups and overview
- Quick setup with tons of factory and user-definable presets
- Access Limiting allows flexible customization of the user interface and prevents unwanted adjustments from other users
- Quickly access channel processing, signal routing and a massive suite of great sounding effects with presets to get you started
- Export presets, shows and complete system backups via Dropbox, email and more
- Set up the show before you arrive at the venue with offline show creation
- Available on iOS, Android, macOS and Windows

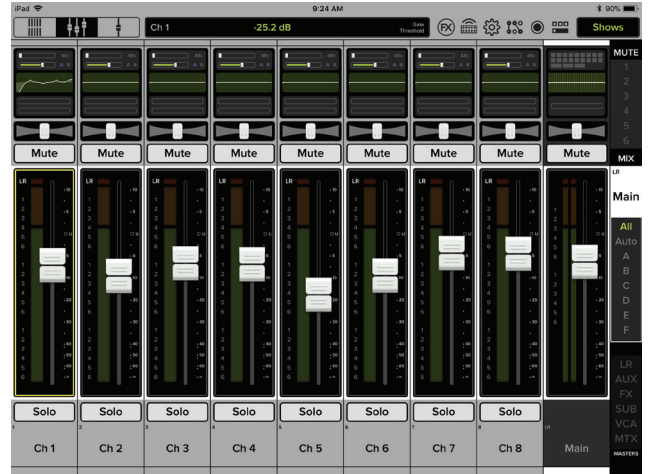


MIXER VIEW

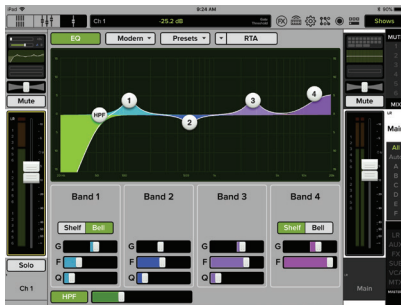

CHANNEL EQ

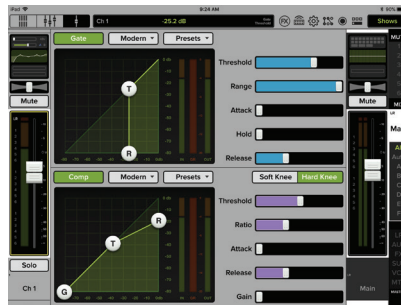

EFFECTS

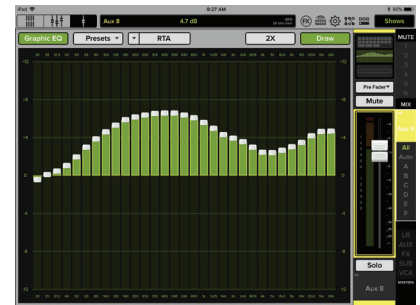

OUTPUT GEQ + RTA

DL16SE
Part#: 2057561
Global SKU's: -00, -01, -02, -03, -04, -05, -06, -07, -08
UPC Code: 00810128261135
Master Pack Quantity: 1
Master Pack Dims: (w) 17.9in × (h)8.6in × (d)8.8in
Individual boxed: 9.9 lb
Individual unboxed: 6.1 lb
Master pack: 10.8 lb
Warranty: 1 year
DL32SE
Part#: 2057565
Global SKU's: -00, -01, -02, -03, -04, -05, -06, -07, -08
UPC Code: 00810128261227
Master Pack Quantity: 1
Master Pack Dims: (w) 21in × (h)8.7in × (d)10.6in
Individual boxed: 12.9 lb
Individual unboxed: 8.7 lb
Master pack: 14.1 lb
Warranty: 1 year



www.mackie.com





DL-SE SERIES

DL16SE
DL32SE

DIGITAL RACK MIXERS

CONFIGURATIONS

Positioning	Digital Rack Mixers	
Input Count	18	34
Mic Inputs	16	32
General User Applications	Band Rehearsal and Performance PA Systems, Regional Touring Acts, Small to Mid-sized Sound Companies, Theater Production, Conference Room PA, Singer/Songwriters, Mobile Recording Studios, Houses of Worship, Music Education	
Ideal Customer Profile	Perfect for customers seeking the extensive tools, streamlined workflow and convenience of complete wireless control that only DL Series digital mixers can provide.	
Mixer Series	DL Series	
Model	DL16SE	DL32SE

SPECIFICATIONS

	DL16SE	DL32SE	
Inputs	Input Channels	18	34
	Mono Mic/Line	16	32
	Mic Preamp Type	Recallable Onyx+	
	Phantom (+48V)	Per Channel	
	Low Cut Filter	Variable	
	Channel EQ	4-Band PEQ + HPF	
	Channel Inserts	Gate + Comp Built-In	
Outputs	Aux Sends	6	8
	Subgroups & VCAs	6 Subs + 6 VCAs	
	Main Outputs	XLR	
	Main Meters	Hi-resolution via Control Device	
	Main EQ	31-Band GEQ, 4-Band PEQ + HPF/LPF	
Other	Level Controls	Virtual Faders via Control Device	
	Internal FX	4 × FX Processors with a massive library of reverbs, delays, choruses, flangers and more. Alignment Delay and RTA on all Outputs	
	Compressors	All Inputs & Outputs	
	Digital Recording	16 × 16 USB to Mac/PC	32 × 32 USB to Mac/PC
	Accessories	Rack ears included	
Construction	Power Supply	Internal Universal 100–240 VAC	
	Rackmount	Included, 3U Rack Spaces	Included, 4U Rack Spaces
	Weight	6.1 lb / 2.8 kg	8.7 lb / 4.0 kg
	Dimensions	Height: 5.6 in / 142 mm Width: 14.1 in / 358 mm Depth: 5.8 in / 147 mm	Height: 7.3 in / 185 mm Width: 17.6 in / 447 mm Depth: 5.8 in / 147 mm

