



**AcousticDesign™ Series
AD-S5T**

5.25" small-format, surface-mount
loudspeaker

Features

- DMT™ (Directivity Matched Transition) ensures smooth, uniform frequency response over the coverage area
- X-Mount™ system enables the loudspeaker to be easily installed and deployed at a variety of angles without slipping over time
- Advanced voicing filter sets using QSC Intrinsic Correction™ available through either Q-SYS processing or CXD Series amplifier platforms
- Low saturation and low loss 70/100V transformers with 8Ω bypass
- Lightweight ABS enclosures offer long-term durability and lasting good looks
- Sealed input panel cover and powder coated aluminum grilles for added weather resistance
- Meets IEC60529 IP-54 for dust and splash resistance
- Available in black (RAL 9011) or white (RAL 9010)
- Complete EASE, CAD & BIM information available online



X-Mount™ (included)

**Restaurant · Retail · Audio Visual · Education · Concourses · Casinos ·
Transportation Terminals · Worship Facilities · Large System Ancillary Support**

The QSC AcousticDesign™ AD-S5T is a surface mounted 70/100 V, 5.25" two-way loudspeaker system, ideally suited for a wide variety of foreground and background sound reinforcement applications.

AcousticDesign™ series offers integrators a premium quality installed sound solution where performance, coverage, and aesthetics are paramount. Combined with unprecedented ease-of-installation and high weather resistance, the AcousticDesign™ Series provides integrators a versatile and confident solution.

The AD-S5T features a high quality 5.25" weather treated paper cone woofer on a 1" voice coil. A carefully selected 1" silk dome tweeter with a 1" voice coil perfectly matches the sensitivity and performance of the woofer for outstanding full range reproduction.

Consistent and even 115° asymmetric (conical) coverage is realized by means of DMT™ (Directivity Matched Transition). This innovation matches the high frequency waveguide to the woofer coverage at the crossover point, resulting in a coherent transducer transition and improved off axis response.

To maintain this frequency response, the AD-S5T utilizes a variable tap 60 watt low saturation and low loss 70/100 V transformer with 8 Ω bypass, accessible via a rotary selector located on the enclosure back under a weather grommet for improved weather resistance.

All AcousticDesign™ Series surface-mount loudspeakers are housed in rugged ABS enclosures for long-term durability. Sealed

input panel covers and powder coated aluminum grilles add weather resistance, exceeding IEC60529 IP-54 for dust and splash resistance.

Installers will appreciate the award winning X-Mount™ system, included with each full range AcousticDesign™ model. This ingenious mounting solution achieves unprecedented ease-of-installation in either horizontal, vertical, wall, or ceiling deployments. Knurled surfaces at the pivot planes ensure the load will not drift or sag over time. Articulation marks allow preconfiguration of the X-Mount™ while on the ground with no special tools required. Once secure, the loudspeaker installs in seconds, allowing the installer to work safer, smarter, and faster with repeatable results.

To further enhance performance and speed of install with optimum result, advanced voicing filter sets using QSC Intrinsic Correction™ techniques are obtainable through either Q-SYS processing or CXD Series amplifier platforms.


Sensitive to aesthetic demand, the AcousticDesign™ Series feature a stylish appearance free of obtrusive logo adornments. Complimenting adjacent product families, AcousticDesign™ surface loudspeakers are available in QSC standard black (RAL 9011) or white (RAL 9010) and may be painted to match any decor.

To assist in successful systems integration, complete EASE, CAD, and BIM files are available for online download at QSC.com.




AD-S5T Details


Horizontal Contour:

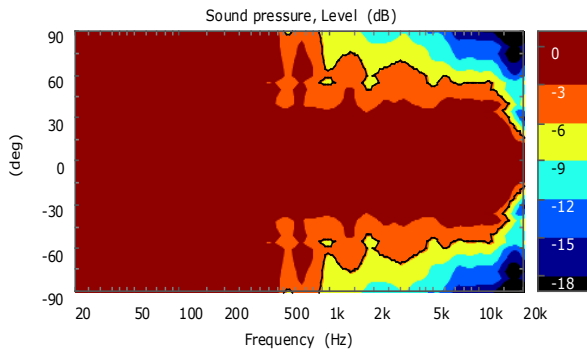

Impedance / Frequency Response:

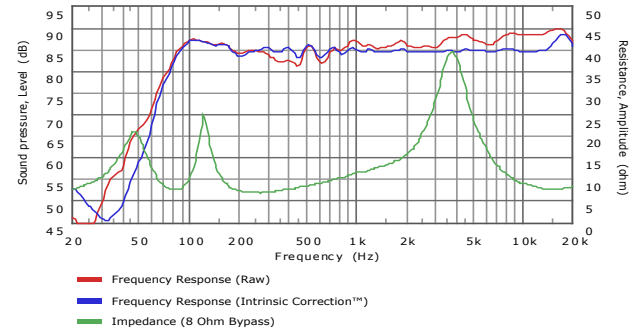

Dimensions:

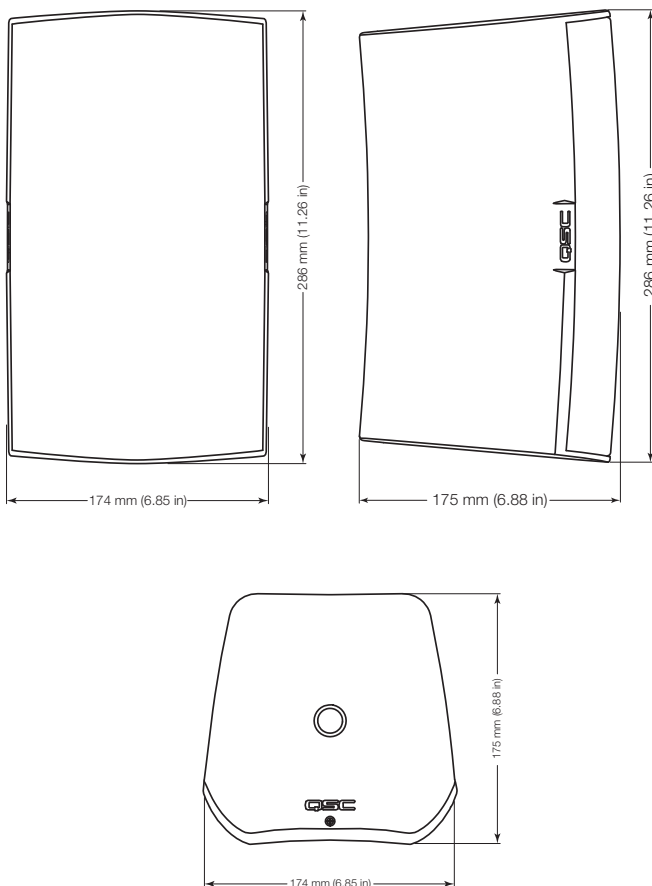

As part of QSC's ongoing commitment to product development, specifications are subject to change without notice.

Specifications:

| System Details | AD-S6T |
|--|--|
| HF transducer | 1 in (25 mm) damped fabric dome tweeter/ 1 in voice-coil, NdFeB magnet |
| LF transducer | 5.25 in (135 mm) paper cone woofer 1 in voice-coil, ferrite magnet |
| Effective frequency range ¹ | 65 – 20 kHz |
| Rated noise power / voltage ² | 100 W |
| Broad-band sensitivity | 86.3 dB SPL |
| Coverage angle (-6 dB) | 115° |
| Directivity factor (Q) | 6.9 |
| Directivity index | 8.4 dB |
| Maximum continuous SPL ⁴ | 106 dB |
| Maximum peak SPL ⁴ | 116 dB |
| Rated impedance | 8 Ω |
| Recommended amplifier power | 300 W |
| Transformer taps | 70 V: 7.5, 15, 30, 60, bypass 100 V: n/a, 15, 30, 60, bypass |
| Input connector type | 4-pin Euroblock connector with parallel output |
| Enclosure material | Painted ABS polymer |
| Grille material | Powder coated aluminum |
| Enclosure Details | |
| Ingress protection | IP-54 |
| Operating environment | Designed for indoor and outdoor use |
| Testing | The AD Series loudspeakers qualified for outdoor use using the following tests: Salt fog: MIL-STD-810G Method 509.5 for 100 hrs. Humidity: MIL-STD-810G Method 507.5, Natural cycle B2, cyclic high RH for 7 days High and low temperature: tested according to QSC internal standards between -20° and 50° C |
| Operating Temperature Range | -20 to 50 °C / -4 to 122 °F |
| Net weight | 9.92 lbs / 4.5 kg |
| Product dimensions | 11.26 x 6.88 X 6.85 in (286 x 175 x 174 mm) |
| Shipping weight | 20.2 lbs / 9.2 kg (pair packed) |
| Shipping dimensions | 15.9" x 10.31" X 18.3" (405 x 262 x 465 mm) (pair packed) |
| Included accessories | X-Mount mounting system, euroblock connector, input panel cover |

¹ Free-field, -10 dB from on-axis sensitivity

² IEC60268-1 noise signal for 2 Hrs

³ On-Axis, free-field sensitivity, 2.83V, 1 m

⁴ Calculated from rated noise voltage and sensitivity



please recycle



1675 MacArthur Boulevard • Costa Mesa, CA 92626 • Ph: 800/854-4079 or 714/957-7100 • Fax: 714/754-6174

© 2020 QSC, LLC all rights reserved. QSC and the QSC logo are registered trademarks of QSC, LLC in the U.S. Patent and Trademark office and other countries. All other trademarks are the property of their respective owners. Patents may apply or be pending.

AD-S5T Spec Sheet 10/07/2020